

INSTALLATION INSTRUCTIONS

These instructions should be read carefully and retained after installation for further reference and maintenance

SAFETY



1. Before installation, maintenance or lamp replacement, ensure that the mains supply to the luminaire is switched off and the circuit supply fuses are removed or circuit breaker turned off.
2. It is recommended that a qualified electrician is consulted or used for the installation of this luminaire and installed to the current edition of the electrical and building regulations.
3. Check that the total load on the circuit including when this luminaire is installed does not exceed the rating of the circuit cable, fuse or circuit breaker.
4. This luminaire is suitable for indoor use in dry locations

RATINGS

1. This luminaire is of class II construction and must not be earthed.
2. ETL Approved for Canada and the USA
3. 120V 60HZ AC rated
4. Suitable for interior use under shelves, in cabinets and bookcases.

SCREW HOLE INSTALLATION FOR WOOD SHELVES

1. Remove fixture from package and remove screw kit from cord
2. Fixing holes must be clear of any obstructions (e.g. cables) within the mounting surface.
3. Use the fitting as a template to determine the desired spacing.
4. Mark the screw holes using the fitting as a template; you may need to rotate the lamp housing to expose the keyhole mounting slots.
5. Fittings may be daisy chained (**8 LUMINAIRE MAX**) using a connecting cable (sold separately)
6. If the luminaire is to be used singularly or is the first in the circuit of a multiple installation (daisy chain) then use the mains lead provided fitted with a mains plug.
7. If multiple installations (daisy chaining) ensure that the safety cover of the last luminaire is closed.
8. The lamp can be removed by pulling down on the diffuser and remove. Turn the lamp through 90 degrees and remove.
9. The reverse operation of the above should be applied to replace the lamp and diffuser.

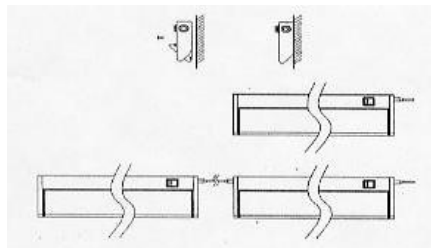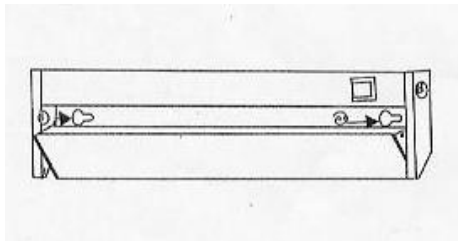

MAGNET INSTALLATION FOR METAL SHELVES

1. Remove fixture from package
2. Ensure the metal shelving is clean, dry and free of debris
3. Position luminaire in desire position on shelf and allow magnet to take hold.
4. Fittings may be daisy chained (**8 LUMINAIRE MAX**) using a connecting cable (sold separately)
5. If the fitting is to be used singularly or is the first in the circuit of a multiple installation (daisy chaining) then use the mains lead provided fitted with a mains plug.
6. If multiple installations (daisy chaining) ensure that the safety cover of the last luminaire is closed.
7. The lamp can be removed by pulling down on the diffuser and remove. Turn the lamp through 90 degrees and remove.
8. The reverse operation of the above should be applied to replace the lamp and diffuser.



NOTICE for Magnetic version: The light is installed in top & level of furniture other degree is not allowed